

Han 10ES-Press-SMC-FI-CCT-PE Press

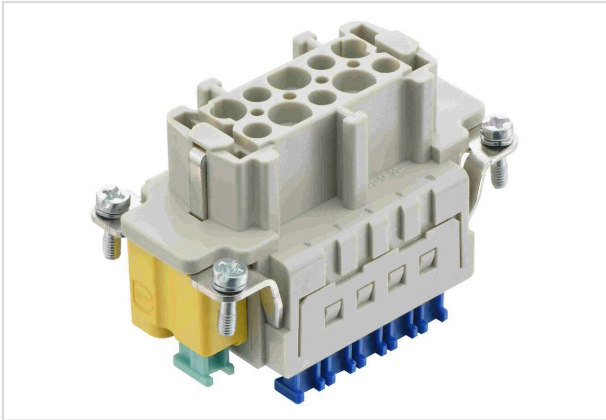


Image is for illustration purposes only. Please refer to product description.

Part number	09 33 010 2778
Specification	Han 10ES-Press-SMC-FI-CCT-PE Press
HARTING eCatalogue	https://b2b.harting.com/09330102778

Identification

Category	Inserts
Series	Han [®] ES Press
Specification	Cage clamp termination for PE connection

Version

Termination method	Cage-clamp termination
Gender	Female
Size	10 B
Number of contacts	10
PE contact	Yes
Details	Blue slide for hoods/housings high construction only

Technical characteristics

Conductor cross-section	0.14 ... 2.5 mm ²
Conductor cross-section	AWG 26 ... AWG 14
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω



Pushing Performance
Since 1945

Technical characteristics

Contact resistance	≤3 mΩ
Stripping length	9 ... 11 mm
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Colour (accessories)	Blue
Material flammability class acc. to UL 94	V-0

Specifications and approvals

Specifications	IEC 60664-1 IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 UL 2237 PVVA2.E318390 CSA-C22.2 No. 182.3 PVVA8.E318390

Commercial data

Packaging size	1
Net weight	75.8 g
Country of origin	Germany
European customs tariff number	85366990
GTIN	5713140186262
eCl@ss	27440205 Contact insert for industrial connectors